

GS Bonded Seals

ISO 6162-2 (SAE J518 Code 62)




Product description

GS bonded seals are designed for metric and imperial pipe-end connections according to ISO 6162-2 / SAE J518 Code 62.

Application

Used on GS pipe ends in hydraulic systems including pumps, valves, manifolds, flange connections and other static pressure connections.

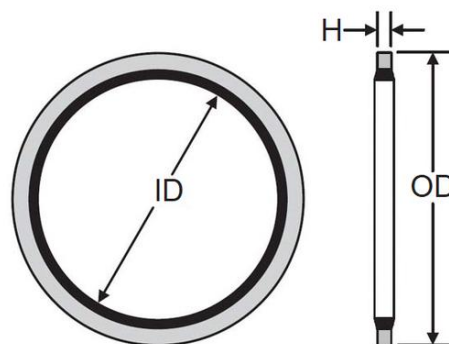

Metric GS pipe ends - ISO 6162-2 (SAE J518 Code 62)

Size	STD Part No.	SS Part No.	H (mm)	OD (mm)	ID (mm)
1/2"	0823	0823SS	2.03	23.80	17.28
3/4"	1213	1213SS	2.34	33.27	24.26
1"	1629	1629SS	2.34	34.93	27.05
1 1/4"	2030	2030SS	3.25	42.80	33.89
1 1/2"	2432	2432SS	3.25	52.38	42.93
2"	3219	3219SS	3.25	63.50	51.69
2 1/2"	4037	4037SS	3.25	75.00	64.39
3"	4839	4839SS	3.25	90.17	76.08

ANSI 36.10 / 36.19 GS pipe ends - ISO 6162-2

Size	STD Part No.	SS Part No.	H (mm)	OD (mm)	ID (mm)
1/2"	0821	0821SS	2.00	15.88	10.37
3/4"	0823	0823SS	2.03	23.80	17.28
1"	1633	1633SS	2.34	28.58	21.54
1 1/4"	2042	2042SS	2.34	39.00	31.00
1 1/2"	2448	2448SS	3.25	44.45	35.94
2"	3260	3260SS	3.25	55.50	46.50
2 1/2"	4073	4073SS	3.25	69.85	54.89
3"	4888	4888SS	4.00	83.80	70.00

All dimensions in mm.

GS Bonded Seals

ISO 6164




Product description

GS bonded seals for metric and ANSI pipe-end connections associated with ISO 6164.

Application

Used on GS pipe ends in hydraulic systems including pumps, valves, manifolds and other static pressure connections.

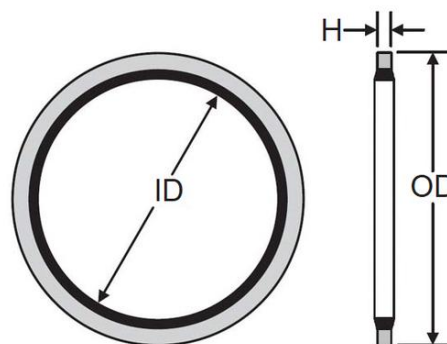

Metric GS pipe ends - ISO 6164

Size	STD Part No.	SS Part No.	H (mm)	OD (mm)	ID (mm)
2"	3219	3219SS	3.25	63.50	51.69
2 1/2"	4037	4037SS	3.25	75.00	64.39
3"	4839	4839SS	3.25	90.17	76.08
4"	5644	5644SS	4.00	110.00	95.00
4 1/2"	6000	6000SS	4.00	126.00	108.00
5"	6455	6455SS	5.00	143.70	127.00
6"	8001	8001SS	8.00	181.00	155.00
8"	9600	9600SS	9.00	240.00	205.00

ANSI 36.10 / 36.19 GS pipe ends - ISO 6164

Size	STD Part No.	SS Part No.	H (mm)	OD (mm)	ID (mm)
2"	3260	3260SS	3.25	55.50	46.50
2 1/2"	4073	4073SS	3.25	69.85	54.89
3"	4888	4888SS	4.00	83.80	70.00
4"	5644	5644SS	4.00	110.00	95.00

All dimensions in mm.